


In-house installations
 House connections
 Distribution pipelines
 Trunk main pipelines
 Transmission main pipelines



GasCheck H₂

Tracer gas leakage detection equipment

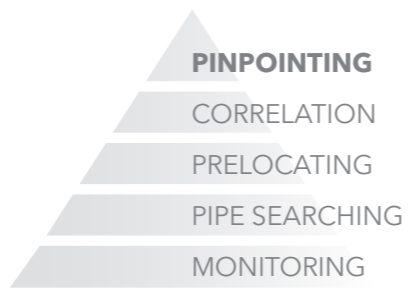

PINPOINTING A LEAKAGE IRRESPECTIVE OF LEAKAGE-BORNE NOISES AND OF AMBIENT NOISES

SHORT RESPONSE TIME AND HIGH SENSITIVITY OF THE HYDROGEN SENSOR

EASY AND PRECISE PINPOINTING OF LEAKAGES

LEAKAGE DETECTION METHOD ACKNOWLEDGED BY THE DVGW / IWA

EQUIPMENT



APPLICATION

- Leading the tracer gas (H₂ N₂) into the pipe via the hydrant, a drilled hole or the meter
- Filled and empty pipes can be exposed to gas
- Significant reduction in the quantity of gas applied by leading the gas into the pipe with the Bubble Creator
- Detecting the spot with the highest gas concentration with the GasCheck

